





DIST	COUNTY	ROUTE	KILOMETER POST TOTAL PROJECT	SHEET NO.	TOTAL SHEETS

July 1, 1999
 PLANS APPROVAL DATE
 The State of California or its officers or agents shall not be responsible for the accuracy or completeness of electronic copies of this plan sheet.


REGISTERED ELECTRICAL ENGINEER
 Sampal
 License No. 10110
 Exp. 6-30-01
 ELEC 10110
 STATE OF CALIFORNIA

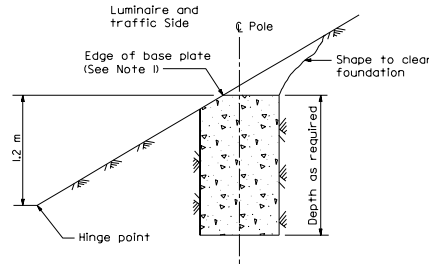

CUT SLOPES
STEEPER THAN 1:4
 See Note 3



FILL SLOPES
STEEPER THAN 1:4
 See Note 3

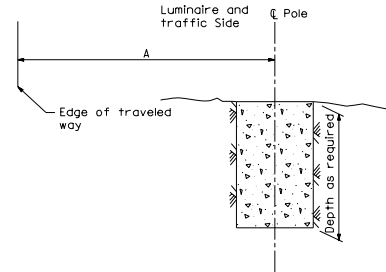

FLAT SECTIONS, CUT OR FILL SLOPES
1:4 OR FLATTER


STANDARD TYPE	SETBACK (DIMENSION A)
32	9 m Min
31, 36-20A	6 m Min
30	Most Arm Length (Min)
22, 35	
15	

FOUNDATIONS ADJACENT TO ALL ROADWAYS EXCEPT
IN SIDEWALK, MEDIAN AND ISLAND AREAS


NOTES

- Where a portion of the foundation is above grade the top edges shall have a 25 mm chamfer.
- Horizontal setbacks on cut and fill slopes steeper than 1:4 shall not exceed the distances shown for flat sections.

1 m Behind median or island curb except centered in 1.2 m to 1.8 m medians, 760 mm Behind curb with wide sidewalk.



MEDIAN, ISLAND
OR WIDE SIDEWALK
 (2 m Wide and wider)



NARROW SIDEWALK
 (Less than 2 m wide)

FOUNDATIONS IN SIDEWALK, MEDIAN AND ISLAND AREAS

STATE OF CALIFORNIA
 DEPARTMENT OF TRANSPORTATION
SIGNAL, LIGHTING AND
ELECTRICAL SYSTEMS
FOUNDATION INSTALLATIONS

NO SCALE
 ALL DIMENSIONS ARE IN
 MILLIMETERS UNLESS OTHERWISE SHOWN

ES-11